

LINEAR POLARIZED UHF MULTI-PURPOSE ANTENNA

SlimLine - A7040

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organizations to transform processes & reduce costs.

Our SlimLine range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form.

Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.

Times-7 Research Ltd
29 Railway Avenue
Lower Hutt 5010
New Zealand

NEW ZEALAND
P: +64 4 974 6566

USA/CANADA
P: +1 858 225 2214

E: info@times-7.com

www.times-7.com



The SlimLine A7040

Ultra-low profile linear polarised flat panel antenna

Just 8 mm / 0.3 in. thick

Typical applications:
Jewelry, retail, industrial / workshop tool tracking & any shelving / cabinet application

Part of the SlimLine range of multi-purpose antennas, the A7040 is sought after for RFID deployments from retail product tracking to industrial / workshop tool tracking. At just 8 mm / 0.3 in. thick, the durable, high performance A7040 is specifically designed for real-time asset / product identification & inventory management. Custom lengths are available.

Specifications


Physical / Environmental Specifications

Dimensions (L x W x D):	400 mm x 250 mm x 8 mm 15.7 " x 9.8 " x 0.3 "
Weight:	1 kg / 2.2 lbs.
Radome Material:	Fire retardant ABS
Environmental Rating:	IP65
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Connector type / position:	SMA female side fly lead (300 mm / 1')


Electrical Specifications

Frequency Range:	864-868 MHz / 902-928 MHz
Polarization:	Linear
Far-field Gain:	7.5 dBi typical
Far-field 3 dB beamwidth:	80° in XZ, 45° in YZ
VSWR	1.6 typical
Front to back ratio:	22 dB
Nominal impedance:	50 Ω
Anti-static protection:	DC grounded
Antenna detection	10 K Ω resistance
Maximum Input Power:	3 W

E-field elevation & Azimuth Patterns

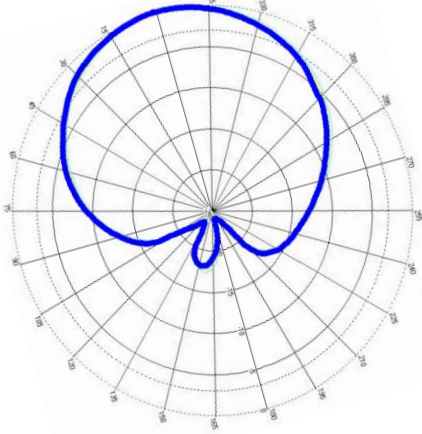

XZ-plane

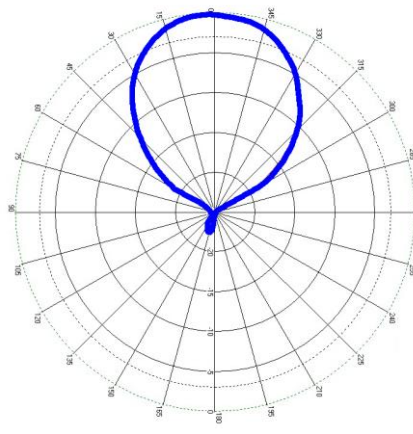

YZ-plane

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A7040	ETSI 864-868 MHz	71201
A7040	FCC 902-928 MHz	71204
Cable Accessories	Cable Type	Part No.
Cable 2 m, SMA to RPTNC	LMR 195 / 240 / 400	71436 / 71782 / 72042
Cable 4 m, SMA to RPTNC	LMR 240 / 400	71784 / 72043
Cable 6 m, SMA to RPTNC	LMR 240 / 400	71904 / 72044
Cable 8 m, SMA to RPTNC	LMR 240 / 400	71788 / 72045

Applications

- Retail
- Jewelry
- Workshop / Industrial Tools
- Any Shelving / Cabinet application



OUR GLOBAL NETWORK

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Times-7 Research Ltd
29 Railway Avenue
Lower Hutt 5010
New Zealand

NEW ZEALAND
P: +64 4 974 6566

USA/CANADA
P: +1 858 225 2214

E: info@times-7.com

www.times-7.com

The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.